

3. FSJ高速刀系列 (FSJ High-Speed Cutter Series)

概述 | Overview

FSJ 高速刀系列适用于粉碎较厚实、密度高或结构复杂的物料，适合连续、高效的工业级处理场景。

FSJ 系列设备既可作为**单机设备使用**，也可集成至**完整的粉碎与回收系统**中，支持连续运行与高效处理，并可根据用户需求与上下游设备进行系统化配置。

典型适用物料 | Typical Materials

- 通用塑料、工程塑料、特种工程塑料、热塑性弹性体、复合与填充材料
- 复合板材、复合包装材料
- 书本、印刷品及装订文件
- 体积大或形状不规则的固体物料

系统集成能力 | System Integration

FSJ 系列支持灵活的系统配置，包括：

- 连续进料与自动化输送系统
- 与打包机、输送设备及除尘系统集成
- 集中式粉碎站或现场处理方案

可根据不同作业环境与处理需求进行灵活配置。

快速选型指引 | Quick Selection Guide

- **PC 系列** —— 适用于塑料边角料、PVC 材料、卡片及轻型硬质物料
- **QL 系列** —— 适用于硬塑料、大块机头料、厚书籍的强力粉碎
- **GD 系列** —— 输送带进料型设备，适合连续进料与大批量处理
- **SL 静音系列** —— 低噪音设计，适用于对环境要求较高的工厂或室内场所
- **宽入口系列** —— 加宽进料口，适合大体积或超宽物料，如电木、PP 板、空心板等
- **定制系列** —— 针对特殊或复杂物料的定制化解决方案

3. FSJ High-Speed Cutter Series

Overview

The FSJ High-Speed Cutter Series is designed for continuous, high-efficiency shredding of thick, dense, and composite materials.

FSJ machines can operate as standalone units or be integrated into complete shredding and recycling systems, supporting continuous operation and flexible system configuration with upstream and downstream equipment.

Typical Materials

- General-purpose plastics, engineering plastics, high-performance plastics, TPE (e.g., TPU, TPV), and composite/filled materials
 - Laminated boards and composite packaging
 - Books and printed materials, and bound documents
 - Oversized or irregular solid materials
-

System Integration

The FSJ series supports flexible system configurations, including:

- Continuous feeding and automated conveying systems
- Integration with balers, conveyors, and dust extraction units
- Centralized shredding stations or on-site processing setups

This flexibility allows the FSJ series to adapt to different operational environments and processing requirements.

Quick Selection Guide

- **PC Series** – For plastic scraps, PVC materials, cards, and light rigid materials
- **QL Series** – For rigid plastics, large plastic runners or bulky plastic scraps, and thick books
- **GD Series** – Belt-fed shredders for continuous feeding and high-volume processing
- **SL Silent Series** – Low-noise shredding for noise-sensitive or indoor environments
- **Wide Feed Series** – Extra-wide feed openings for bulky or oversized materials, such as Bakelite sheets, PP boards, and hollow boards
- **Custom Series** – Tailor-made solutions for special or complex materials

子系列:

PC 片刀系列 (PC Series)

适用于塑料膜、广告PVC边角料、卡片 产品选型表: 畅销产品型号: YD-FSJPC300

PC Series – Plastic Crusher

Designed for on-site or centralized shredding of plastic waste, including films, sprues, rejected parts, and PVC scraps.

Quick Selection快速选型

Front View

OVERALL

Model

YouTube

Price

PC Series (PC片刀系列)



PC300
PC400
PC500
PC600

QL Series (QL强力系列)



QL300
QL400
QL500
QL600
QL800

GD Series (Belt Feeding System) (GD滚刀系列)



GD370




GD800
GD1200

SL Silent Series




SL600
SL700

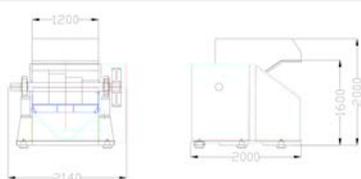

SL60120

Custom Cutter Series



SL6090

PC 系列粉碎机 Plastic Crusher

产品概览 Product Overview




大马力电机 澎湃动力
纯铜电机 动力强劲



合金钢刀片
经久耐用



筛网 出料尺寸由网孔尺寸决定
下图 8mm 尺寸筛网图
可定制 3mm 18mm 等筛网孔尺寸



粉碎各种软硬塑胶，将块状、条状及水口塑胶粉碎成颗粒，对塑胶次品、废品、水口料的迅速回起到重要作用，可做在线机边粉碎机，置于主机边；也可做某生产区域线下集中处理粉碎机。

特点:

- 高铬工具钢,间隙可调,经久耐用
- 超大惯性轮,扭矩大,产能高.
- 重荷型轴承及防尘装置,并有防音隔板，能有效防止震动和噪音
- 交替式切削有效减少粉尘及节能
- 移动脚轮,方便摆放.

主要参数 Technical Specifications

Model	PC250	PC300	PC400	PC500
电机功率Power (kw)	4	4	7.5	11
主轴转速 Rotating Speed (r/min)	570	570	570	550
旋转直径 Rotating Φ Dia (mm)	200	200	300	300
动刀数 Moving blades (pcs)	3	3	3	6
定刀数 Fixed blades (pcs)	2	2	2	2
进料口尺寸 Feeding inlet (mm)	310x170	360x170	460x230	560x230

粉碎能力 <i>Crushing ability (kg/h)</i>	150	200	300	400
筛网直径 <i>Screen mesh Φ (mm)</i>	$\Phi 8$	$\Phi 8$	$\Phi 10$	$\Phi 10$
重量 <i>Net Weight (kg)</i>	130	150	370	450
外形尺寸 <i>Dimensions (L*W*H)</i> (mm)	920*620*1100	920*670*1100	1160*800*1360	1180*960*1380

越都 YD-FSJPC300 机型 产品性能介绍 和 主要参数

产品概览 Product Overview

图 1: 整机图




图 2: 纸团粉碎



图 3: 财务凭证粉碎



粉碎效果:

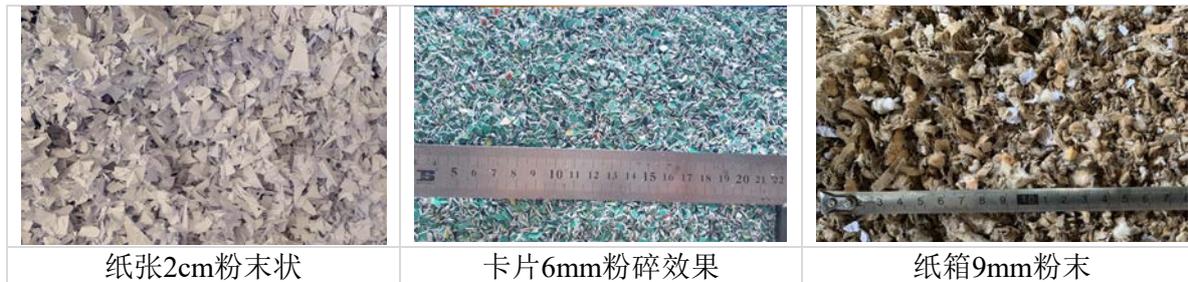

纸张2cm粉末状

卡片6mm粉碎效果

纸箱9mm粉末

主要参数 Technical Specifications

型号 YD-FSJPC300

入料口离地高	102cm
入料口尺寸	35*20cm
粉碎尺寸	8mm内粉末状 (可选配3CM, 2CM 或3mm, 5mm 粉末)
电压功率	380v 4kw 50Hz工业用电 或 220V 4KW办公用电 (可选) (出厂标配380V电机。如需配置220V市电机型, 请下单前联系客服。)
刀具转速	550r/min
外形尺寸	93*67*117cm 长*宽*高
机重	180KG
工作视频	哔哩哔哩视频1——粉碎100张纸: https://b23.tv/NEEZpDp 哔哩哔哩视频2——粉碎广告PVC物料: https://b23.tv/Tbdi7p4
产品价格	6931元

QL 强力系列 (QL Series)

适用于财务会计凭证、书本等较厚的材料 产品选型表: 畅销产品型号: YD-FSJQL300 YD-FSJQL400 YD-FSJQL500 YD-FSJQL600 YD-FSJQL800

YD-FSJQL 系列 300-800 型漏斗大功率机型

产品概览 Product Overview

YD-FSJQL300



YD-FSJQL400



YD-FSJQL500



YD-FSJQL600



核心优势 Key Features

- 大马力
- 合金刀具

- 符合EHS标准：符合环境、健康与安全标准。
- 大块机头料粉碎

主要参数 Technical Specifications

产品型号	YD-FSJQL300	YD-FSJQL400	YD-FSJQL500	YD-FSJQL600	YD-FSJQL800
入口尺寸(mm)	310*260	410*260	510*260	610*310	810*410
碎纸张数 ¹	30-50张	70-80张	100-150张	200-300张	400-800张
粉碎能力 ² (kg/h)	100-200	150-250	200-350	300-600	500-800
电机功率	5.5KW, 380V	7.5KW, 380V	11KW, 380V	15KW, 380V	30KW, 380V
出料 (可定制) ³	8mm	8mm	8mm	8mm	8mm
产品尺寸 (m)	1.22x0.72x1.16	1.32x0.86x1.46	1.45x1.00x1.54	1.70x1.15x1.88	2.22x1.38x2.38
重量 (kg)	450	550	750	850	2000
产品售价 (含税)	15847	19781	23929	38423	79618

¹ 表格中粉碎张数为首次投料的张数，机器长期工作时，每次应均匀投料，待粉碎腔体中物料粉碎完毕后，再进行投料操作，如果连续投料，建议每次投料塑料为表格中数值的1/3以内。

² 该粉碎能力为最大值，比如粉碎硬质塑料类物料；如果粉碎纸张，粉碎能力会打折，粉碎产量与出料尺寸有关（粉碎尺寸越大，出料越快），如果粉碎纸张，建议粉碎为3cm尺寸速度较快，粉碎能力约为表格中最大粉碎数值的1/3。

³ 可定制3mm 5mm 8mm 15mm 18mm 25mm 28mm 等规格尺寸，出厂标配为8mm尺寸，更多信息详询公司客服。

YD-FSJQL300 | 400 | 500 | 600 | 800

Product Overview



Constructed with specialized wear-resistant steel, this innovative design guarantees unmatched bite force, exceptional durability, and an extended service life. The oversized inertia wheel amplifies torque and maximizes capacity, ensuring peak performance under demanding conditions.

Technical Specifications:

Product Model	YD-FSJQL300	YD-FSJQL400	YD-FSJQL500	YD-FSJQL600	YD-FSJQL800
Inlet Dimensions (mm)	310*260	410*260	510*260	610*310	810*410
Number of Sheets Shredded ⁴	30-50	70-80	100-150	200-300	400-800
Shredding Capacity ⁵ (kg/h)	100-200	150-250	200-350	300-600	500-800
Motor Power	5.5KW, 380V	7.5KW, 380V	11KW, 380V	15KW, 380V	30KW, 380V
Shredded Size(Customizable) ⁶	8mm	8mm	8mm	8mm	8mm
Dimensions (m)	1.22x0.72x1.16	1.32x0.86x1.46	1.45x1.00x1.54	1.70x1.15x1.88	2.22x1.38x2.38
Weight (kg)	450	550	750	850	2000
Pricing RMB	11765	15261	19792	31423	79618

⁴ For Long-Term Operation: Feed materials evenly and wait until the materials in the shredding chamber are fully processed before adding more. For continuous feeding, ensure each batch is no more than one-third of the value specified in the table.

⁵ Shredding Capacity: The listed capacity is the maximum, applicable to hard plastics. For materials like paper, the shredding capacity decreases and depends on the output size (larger sizes process faster). For shredding paper, a 3 cm output size is recommended for faster processing.

⁶ Customizable Sizes: Available in 1mm, 3mm, and 5mm specifications. For additional options, please contact customer service.

YD-FSJQL800



主要参数 Technical Specifications

产品型号	YD-FSJQL800
入口尺寸(mm)	810*410
碎纸张数	400-800张
粉碎能力 ⁸ (kg/h)	500-800
电机功率	30KW, 380V
出料 (可定制)	8mm
产品尺寸 (m)	2.22x1.38x2.38
重量 (kg)	2000

7

表格中粉碎张数为首次投料的张数，机器长期工作时，每次应均匀投料，待粉碎腔体中物料粉碎完毕后，再进行投料操作，如果连续投料，建议每次投料塑料为表格中数值的1/3以内。

8

该粉碎能力为最大值，比如粉碎硬质塑料类物料；如果粉碎纸张，粉碎能力会打折，粉碎产量与出料尺寸有关（粉碎尺寸越大，出料越快），如果粉碎纸张，建议粉碎为3cm尺寸速度较快，粉碎能力约为表格中最大粉碎数值的1/3。

⁹ 可定制3mm 5mm 8mm 15mm 18mm 25mm 28mm 等规格尺寸，出厂标配为8mm尺寸，更多信息详询公司客服。

定制 YD-GD370 系列参数对比表 | 切条切断效果

Image 1: Side view of the whole machine
图1: 整机侧面图



Image 2: Discharge outlet
图2: 出料口



Image 3: Overall view of the machine with additional discharge conveyor belt
图3: 整机大图 加配出料输送带



Image 4: Overall view of the machine with additional discharge conveyor belt at the customer site
图4: 整机 加配出料输送带 用户现场



Effects of various materials (strip and block):
各类材料效果 (条状和块状)

Strip: Adhesive
条状: 不干胶



Strip: Wood fiber board
条状: 木质纤维板



Strip: Paper
条状: 纸张



The blades are wear-resistant and have a long service life, making them suitable for shredding various sensitive materials. The main body of the shredder is welded with Q345B material and undergoes stress relief treatment, ensuring good stability, impact resistance, and vibration resistance, thus ensuring safe operation under long-term heavy loads. Shredding Effect: Customized output in strip or chip form according to customer requirements (as shown in the figure above). Discharge Method: Can be connected to an external discharge conveyor or central suction duct. Can shred: Wood cellulose, paper, film, cardboard, etc.

刀具耐磨、使用寿命长，适合多种涉密介质的粉碎；该碎纸机主机体采用Q345B材料焊接、消除应力处理，具有良好的稳定性、抗冲击性、振动性，确保设备在长时间重负荷中安全运行。**粉碎效果：**根据客户要求，定制出料条状或者出料片状（如上图）。**出料方式：**可外接出料输送线或中央吸风管道。**可碎：**木质纤维素，纸张，菲林，纸箱，等。

主要参数 Technical Specifications

Product Model 产品型号	YD-GD370A型	YD-GD370B型 变频控制
Entry Width 入口宽度	370mm (可定制宽度, 如42cm,60cm,80cm)	

Shredded Size [1] 粉碎后尺寸 ¹⁰	Size A1: Options for strip sizes of 2.5cm, 5cm, and 8cm. 尺寸A1: 2.5CM, 5CM, 8CM 条状可选 Size A2: Options for strip sizes of 1cm, 3cm, and 5cm. 尺寸A2: 1CM, 3CM, 5CM条状可选	Size B1: 8mm strips (operators can adjust shredding size from 8 to 80mm strips). 尺寸B1: 8mm条 (操作人员可自行调整粉碎尺寸8~80mm条) Size B2: 3mm strips (operators can adjust shredding size from 3 to 30mm strips). 尺寸B2: 3mm条 (操作人员可自行调整粉碎尺寸3~30mm条)
Total Motor Power 电机总功率	7KW	7KW
Input Belt 输入带	1400*330mm; Standard factory configuration, extendable according to user requirements for convenient on-site feeding by specific users. 出厂标配, 可根据用户需求延长, 方便特定用户现场进料	
Output Belt 输出带	1400*330mm; Optional: Standard factory configuration does not include discharge conveyor belt. 选配, 出厂标准配置不含出料输送带	
Main Machine Dimensions 主机尺寸	2100*1000*1100mm	
Capacity 产量	300-500kg/h	
Product Price 产品价格	Size A1: RMB 34,100 尺寸A1: 34100元 Size A2: RMB 36,100 尺寸A2: 36100元	Size B1: RMB 36,786 尺寸B1: 36786元 Size B2: RMB 38,786 尺寸B2: 38786元

Description: This model belongs to the belt-fed shredder series, commonly used in waste disposal stations and large-scale document destruction centers.

说明: 本机型为皮带进料碎纸系列, 常用于废品站和大型文件销毁中心。

¹⁰ 可根据客户要求定制粉末状粉碎效果。

YD-GD800 机型 条状效果

产品概览 Product Overview

Model: YD-GD800B | Produces strip-cut effect




主要参数 Technical Specifications

	English	简体中文
Equipment Parameters: 设备参数	<ul style="list-style-type: none"> - Blade Length: 800mm - Shredded Strip Width: 5 - 30mm (adjustable) - Effective Width of Feed Inlet: 720mm - Cutting Thickness: Within 5-8cm - Matching Power: 23KW - Input Conveyor: 3000*720mm - Output Conveyor: 3000*720mm - Control: Electric Control Box 	<ul style="list-style-type: none"> 刀具的长度 800mm 粉碎条状的宽度 5 - 30mm (可调) *可定做粉末状, 如3mm 或者5mm方块 进料口有效宽度 720mm 剪切厚度 5-8cm以内 配套动力 23KW 输入带 3000*720mm 输出带 3000*720mm
Pricing 价格	<p>Pricing RMB: RMB 127500</p> <p>Pricing USD: 18215</p>	<p>不含税含运价格 99780元</p> <p>含税含运价格 127500元</p>
User Site Case Study Video 1 用户现场 1	<p>Secure Document Disposal: YUEDU GD Series Book Shredder Solution</p> <p>https://youtube.com/shorts/u4YYAzKWnjE</p>	<p>【烟包二维码粉碎方案 (第2集)】: https://b23.tv/D4hHk2w</p>
User Site Case Study Video 2 用户现场 2	<p>https://youtube.com/shorts/mdwfXZ2o6l0</p>	<p>【包装印刷厂卷烟厂产品包装二维码粉碎方案 (第三集)】: https://b23.tv/aQ4ADPm</p>

Installation Dimension Diagram (Three Views)

安装尺寸图（三视图）

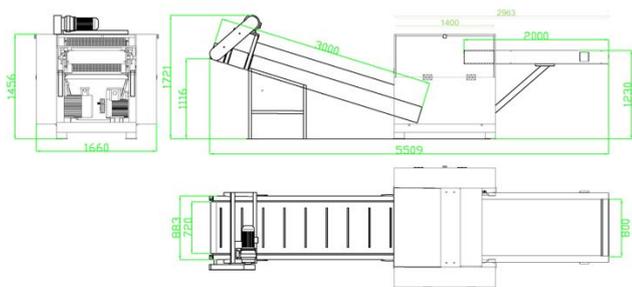

The dimensions confirmed by both parties shall prevail when placing the order.

以下单时，双方确认尺寸为准

SL 静音型强力系列 (SL Silent Power Series)

低噪音，适合3-5CM整本标书粉碎 产品选型表： 畅销产品型号： YD-SL400 YD-SL500 YD-SL600 YD-SL700 YD-SL800

YD-SL500 | 600 | 700 静音型大功率书本粉碎机



整机正面图



整机内部图



安全入料口



全封闭废料仓

二十年的设计卓越 | 创新的客户应用与全球尖端技术

我们自主研发的新产品融合了数十年的经验、实用的客户应用以及最先进的技术。其主要特点包括但不限于以下方面：

- **符合EHS标准：**完全符合跨国企业的环境、健康与安全标准。
- **高效低耗：**节省成本，同时提供卓越性能。
- **零泄漏：**运行过程中无材料泄漏、无粉尘排放、无物料回流。
- **处理极限材料：**超厚、超硬材料的加工。
- **适应低熔点塑料和橡胶：**适合处理对热敏感的材料。
- **兼容玻纤和矿物材料：**专为坚硬、磨蚀性物质设计。

行业领军者的首选

我们是跨国企业、行业领导者以及全球500强企业的首选合作伙伴。

技术参数：

产品型号	YD-SL500	YD-SL600	YD-SL700	YD-SL800
入口尺寸(mm)	400*250	500*260	600*300	700*500
碎纸张数 ¹¹	150-250张	300-500张	400-600张	500-700
粉碎能力 ¹²	200-350 kg/h	300-600 kg/h	400-600kg/h	500-700kg/h
电机功率	7.5KW, 380V	11KW, 380V	15kw, 380V	30kw
出料（可定制 ¹³ ）	8mm	8mm	8mm	8mm
尺寸（mm）	840*1000*1563	994*1160*1689	1260*1200*1950	1300*1250*2400
重量（kg）	450	700	900	1200
产品价格	6.7669万元	8.2715万元	9.7761万元	

¹¹ 长期运行：请均匀投料，并在粉碎室内材料完全处理后再加入新的材料。对于连续投料，每批次的投料量不得超过表格中规定值的三分之一。

¹² 粉碎能力：所列的粉碎能力为最大值，适用于硬质塑料。对于纸类材料，粉碎能力会降低，并取决于输出尺寸（尺寸越大处理速度越快）。建议粉碎纸类材料时选择3厘米的输出尺寸以提高处理效率。

¹³ 可定制尺寸：提供1毫米、3毫米和5毫米规格。若需其他选项，请联系客户服务。

YD-SL500 | 600 | 700 Silent High-Power Book Shredder



Front View



Internal View



Safe Feeding Inlet



Fully Enclosed Waste Bin

🏆 Twenty Years of Design Expertise, Proven Client Applications, and Innovative Global Technologies

As a pioneering new product, it integrates two decades of engineering excellence, extensive client application cases, and globally innovative technology. Features include but are not limited to:

- **EHS-Compliant:** Fully aligned with global Environmental, Health, and Safety standards, trusted by multinational corporations.
- **High Efficiency, Low Energy Consumption:** Saves costs while delivering exceptional performance.
- **Zero Leakage:** No material leakage, no dust emissions, and no material return during operation.
- **Handles Extreme Materials:** Suitable for ultra-thick and super-hard materials.
- **Adaptable to Low-Melting Plastics and Rubber:** Ideal for processing heat-sensitive materials.
- **Compatible with Glass Fiber and Mineral Materials:** Designed for tough, abrasive substances.

🌍 Preferred by Industry Leaders

The first choice for multinational corporations, industry leaders, and Fortune Global 500 enterprises.

🔧 Technical Specifications:

Product Model	YD-SL500	YD-SL600	YD-SL700	YD-SL800
Inlet Dimensions (mm)	400*250	500*260	600*300	700*500
Number of Sheets Shredded ¹⁴	150-250	300-500	400-600	500-700
Shredding Capacity ¹⁵	200-350 kg/h	300-600 kg/h	400-600kg/h	500-700kg/h
Motor Power	7.5KW, 380V	11KW, 380V	15kw, 380V	30kw
Shredded Size(Customizable) ¹⁶	8mm	8mm	8mm	8mm
Dimensions (mm)	840*1000*1563	994*1160*1689	1260*1200*1950	1300*1250*2400
Weight (kg)	450	700	900	1200
Pricing RMB	67669	82715	97761	
Min. RMB	25714	36429	55715	

¹⁴ For Long-Term Operation: Feed materials evenly and wait until the materials in the shredding chamber are fully processed before adding more. For continuous feeding, ensure each batch is no more than one-third of the value specified in the table.

¹⁵ Shredding Capacity: The listed capacity is the maximum, applicable to hard plastics. For materials like paper, the shredding capacity decreases and depends on the output size (larger sizes process faster). For shredding paper, a 3 cm output size is recommended for faster processing.

¹⁶ Customizable Sizes: Available in 1mm, 3mm, and 5mm specifications. For additional options, please contact customer service.

SL 静音型大入口系列 (Wide Feed Series)

大口入，适合较大物料。如：塑料桶、真空挤出物料、复合材料等 产品选型表：

畅销产品型号： YD-SL3040 YD-SL4060 YD-SL6090 YD-SL60120

典型应用：

塑料真空挤出行业

木塑板

大口径塑料

YD-SL Series 3040-60120 Silent Shredder

Industry Solutions: Confidential Destruction + Packaging Printing

产品概览 Product Overview



🏆 Twenty Years of Design Expertise

- **EHS-Compliant:** Fully aligned with global Environmental, Health, and Safety standards, trusted by multinational corporations.
- **High Efficiency, Low Energy Consumption:** Saves costs while delivering exceptional performance.
- **Zero Leakage:** No material leakage, no dust emissions, and no material return during operation.
- **Handles Extreme Materials:** Suitable for ultra-thick and super-hard materials.
- **Adaptable to Low-Melting Plastics and Rubber:** Ideal for processing heat-sensitive materials.
- **Compatible with Glass Fiber and Mineral Materials:** Designed for tough, abrasive substances.

🌐 Preferred by Industry Leaders

The first choice for multinational corporations, industry leaders, and Fortune Global 500 enterprises.

🔧 Technical Specifications:

Product Model	YD-SL3040	YD-SL4050	YD-SL4060	YD-SL4090	YD-SL6080	YD-SL60120
Inlet Dimensions (mm)	320*420	400*520	400*600	400*900	620*800	620*1200
Feed Height	1350	1700	1700	1600	2300	1600
Crushing Capacity (kg/h)	100-200	500-600	600-800	1000-1200	1300-1500	2600-3000
Motor Power	5.5KW, 380V	22KW, 380V	37KW, 380V	37KW, 380V	37KW, 380V	55KW, 380V
Discharge (Customizable)	8mm	12mm	12mm	12mm	12mm	14mm
Product Dimensions (m)	950*1120*1750	1788*1200*2100	1788*1200*2100	1850*1500*1810	2100*1800*3000	2000*2140*2000
Weight (kg)	550KG	1400KG	1200KG	1800KG	2500KG	7500KG
Product Price (including tax)	9.7751万元	15.8571万元	18.9785万元	25.9071万元	34.8571万元	49.9715万元
Agent Price	6.825万元	9.9735万元	12.8839万元	18.8304万元	25.7679万元	35.6785万元

YD-SL60120 | 1.2米*0.62米 大入口板材粉碎机

越都1.2米宽大入口粉碎机，专为1米宽度以上的板材类材料粉碎处理而设计。

它能轻松粉碎各类塑料橡胶物料、纸张纸箱物料、展示广告牌、会议广告板等各种展示板和说明材料，确保高效、安全、操作简便。



刀具有效切割宽度：12000mm

刀片材料：D2

PP板粉碎备注：针对PP材质特别实用，如果工厂现场是24小时工作，使用三个月需要磨一次刀片

旋转直径：

刀具转速：

进料口高度：1600mm

入口宽度：1200mm * 620mm

整机尺寸：长2米，宽2.14米，高2米

整机重量：7500KG

粉碎尺寸：14mm（可调整尺寸）

整机功率：55kw，英国卧龙电机

产能：3000-5000kg/小时

定制系列 Custom Cutter Series

适用于特种物料，如 磁性塑料，如 复合材料

+ 更多定制案例 Custom Case


 Front View

 OVERALL

 On-Site

 YouTube

磁性塑料

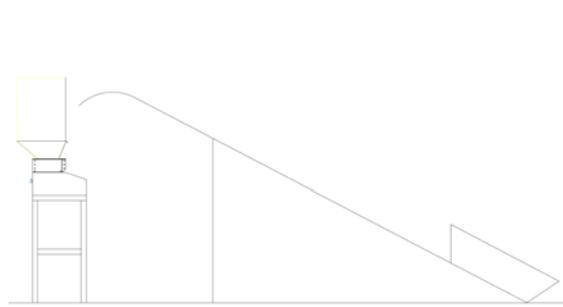

Merck



